

THERMOCOUPLE THERMOMETER





IP67 HACCP K Type Thermocouple Thermometer 8802/8804

- Rigid housing design and the fast response K type probe
- Twice data updating in 1 second time interval
- Follow HACCP principle to check food safety by using Green/Red backlight to indicate temperature hazards
- One touch to display temperature change from baseline
- Temperature high alarm threshold is programmable
- Count down timer is included in device
- 99 manual memory is included in device **(8804 only)**



Follow **HACCP** principle, using Green/Red backlight to indicate temp. **hazards!**

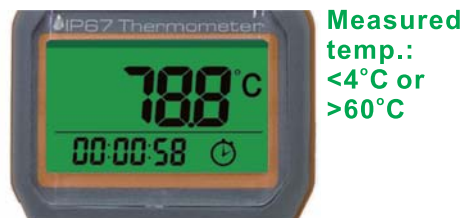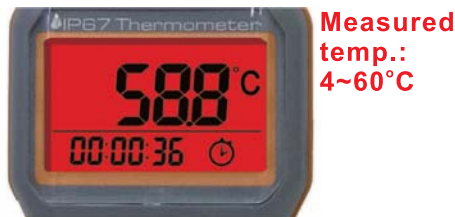


Ordering Code

VZ8802AZ, 8802 K type thermometer
 VZ8804AZ, 8804 K type thermometer
 VZ8802PAZ, IP67 K type probe
 VM4889PD, stainless probe holder

Model	8802	8804
Measuring Range	-50~200°C(-58~392°F)	
Resolution	0.1°C/0.1°F	
Accuracy (under 18~28°C ambient temp.)	+/- (1% of reading + 1°C)	
IP rating	IP 67	
Temp. Response time	60 seconds typical	
99 memories	NO	YES
LCD update time	2 times update every second	
LCD size (mm, HxW)	54 x 32.5	
Probe size(mm)		
Length	150	
Diameter	3.2	
Handle length(mm)	85	
Cable length(mm)	1100	
Probe Weight	~50g	
Operating temp.	0~50°C	
Operating RH%	Humidity < 80%	
Storage temp.	-20~50°C	
Storage RH%	Humidity < 90%	
Dimension(mm,LxWxT)	169 x 78.3 x 34.4	
Weight	~200g	
Battery	6pcs AAA battery	
Standard Package	Meter, K probe, stainless holder, battery, manual	
Optional Accessory	Custom made K probes are available upon request	



K TYPE PENETRATE PROBE
 P/N: VZ8802PAZ
 Temp. Range: -50~200°C
 Length: 150mm
 Diameter: 3.2mm
 Handle length: 85mm
 Cable length: 1100mm



STAINLESS PROBE HOLDER
 P/N: VM4889PD
 Included in standard package to offer you steady probe support!